

**Product Code:**

LPB3024SW1005-TA-24-3.5-R


**Picture:**

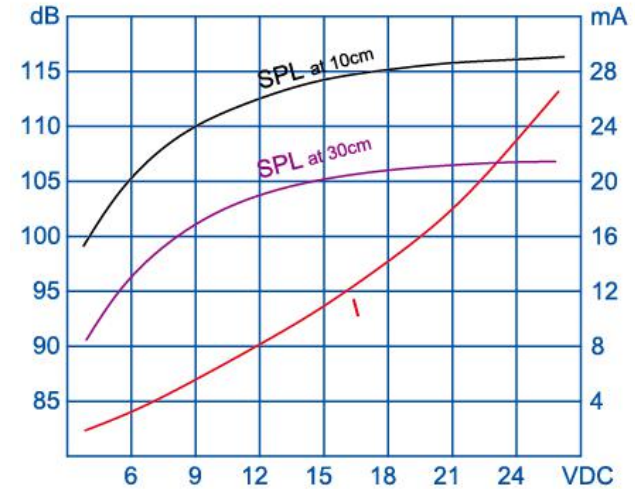
**Specification:**

Rated Voltage	(VDC)	24
Operating Voltage	(VDC)	5~30
*Rated Current	(mA)	≤30
*Sound Output at 30cm	(dB)	≥100
*Resonance Frequency	(KHz)	3.5±0.5
Tone		Continuous
Operating Temperature	(°C)	-20~+70
Storage Temperature	(°C)	-30~+80
Weight	(g)	12.8
Housing Material		ABS
RoHS		Yes

**Remark: The special requirements in the test for no anti reverse connection.**

\*Value applying at rated voltage.

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

**SPL & Current Consumption vs. Input Voltage:**

**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

